
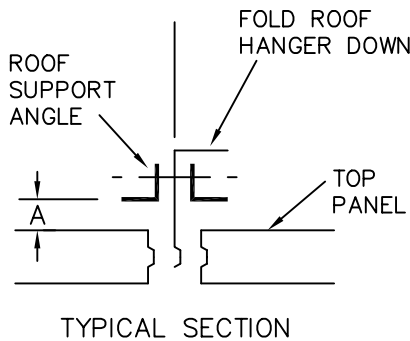


TOP PANEL DESIGN LOADS

LIVE LOAD	-	10 LBS/SQ.FT.
DEAD LOAD	-	4 LBS/SQ.FT.
WIND LOAD	-	0
DEFLECTION	-	L/180

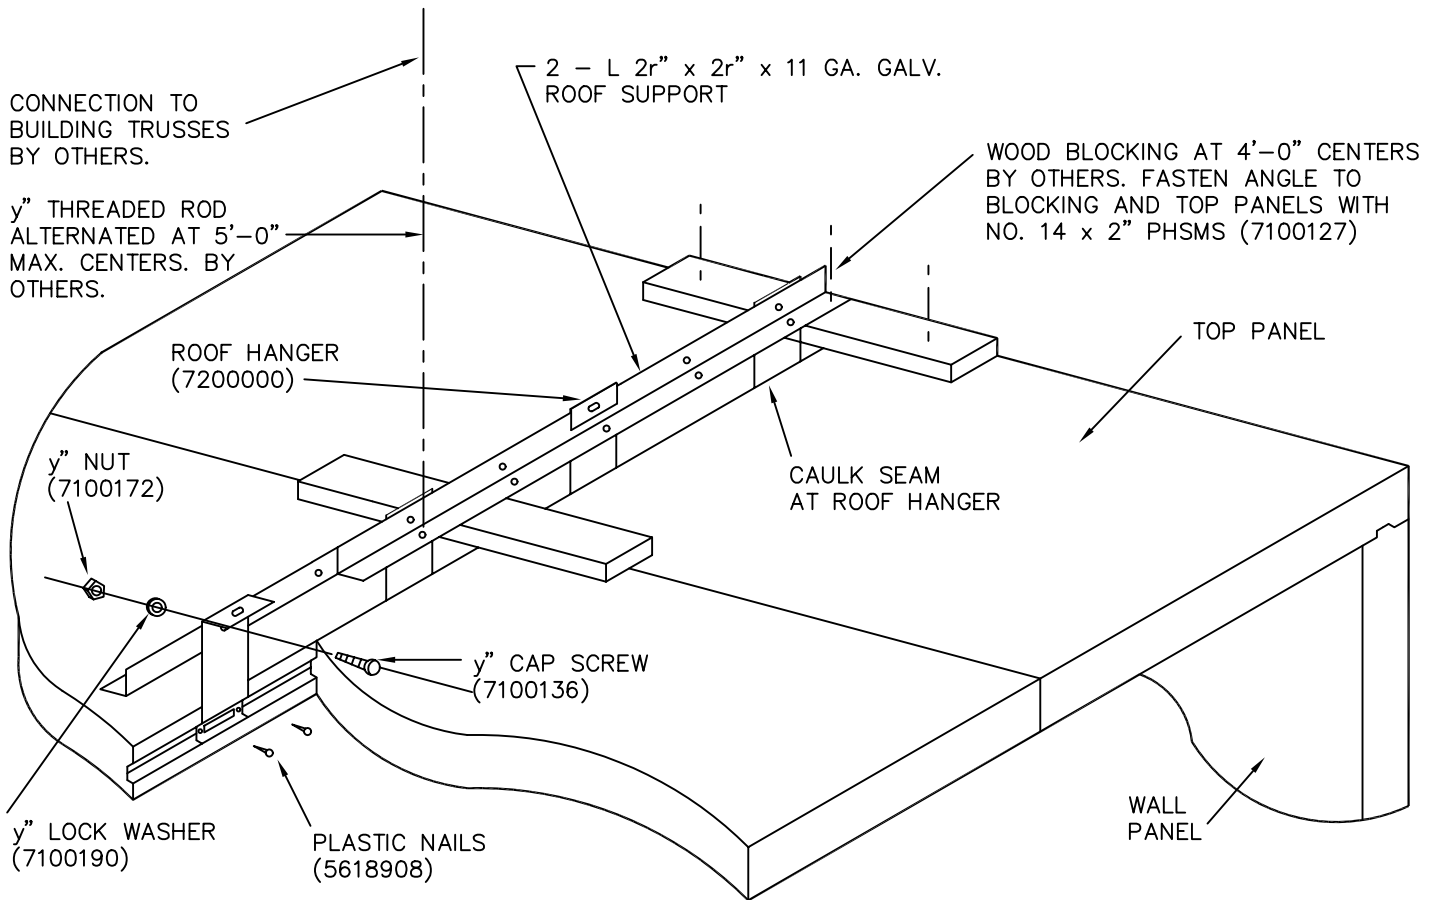

IMPORTANT: THE ROOF SUPPORT SYSTEM INCORPORATED IN THE WALK-INS IS INTENDED TO SUPPORT THE TOP PANELS ONLY, WITH A MINIMUM AMOUNT OF INSTALLATION TRAVEL. AVOID THE STACKING OF COMPONENTS OR EQUIPMENT IN CONCENTRATED LOADS DURING AND AFTER INSTALLATION.

A = 2" FOR 3i" PANEL
 A = 1s" FOR 4" PANEL

REV. 07-08-02 GER

DESCRIPTION:

STANDARD
 EXTERIOR STEEL SUPPORT
 SUPPORTED FROM BLD'G

DWG. NO. EML6A-01
 SECTION: EXT. STEEL
 DATE: 2-26-91
 BY: G.E. RANDALL



International Cold Storage
 Andover, Kansas
 Sales 800-835-0001
 Service 800-333-5653
 a division of
 Carrier Commercial Refrigerator, Inc.

ENGINEERING GUIDE

6A.01